


JONS All-Welded



ALL YAMAHA FOUR STROKES EXCEED FEDERAL EPA 2006 EMISSION REQUIREMENTS. The new F60, F75 and F90 horse models have earned a California C.A.R.B. three-star rating.

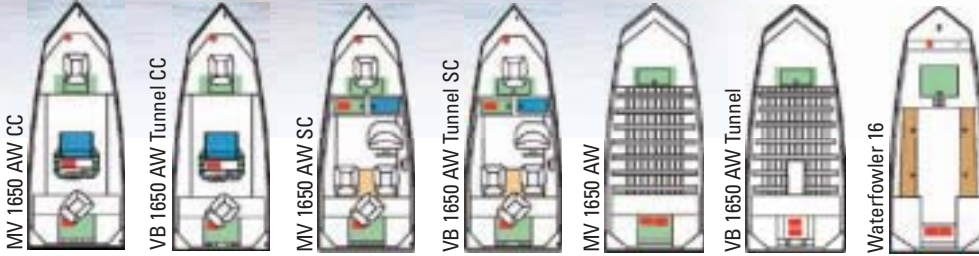

	LENGTH	BOTTOM WIDTH	BEAM/SIDE HEIGHT	TRANSOM HEIGHT All-aluminum	HORSEPOWER—maximum	HORSEPOWER—opt. console	FUEL TANK	WEIGHT—approximate	CAPACITY—persons/lbs.	HULL GAUGE	HULL TYPE—All-Welded	NUMBER OF RIBS	SIDE CONSOLE No-feedback steering	CENTER CONSOLE no-feedback steering, 6 rod holders seat w/ backrest cushion, grab rail	WINDSHIELD
MV 1650 AW CC	16' 0"	50"	74"/22"	21"	60 HP	—	—	690#	5/855#	.102"	Modified-V	11	—	4	4
VB 1650 AW Tunnel CC	16' 0"	50"	74"/22"	21"	60 HP	—	—	690#	5/855#	.102"	Flat-V tunnel	11	—	4	4
MV 1650 AW SC	16' 0"	50"	74"/22"	21"	60 HP	—	—	680#	5/855#	.102"	Modified-V	11	4	—	4
VB 1650 AW Tunnel SC	16' 0"	50"	74"/22"	21"	60 HP	—	—	680#	5/855#	.102"	Flat-V tunnel	11	4	—	4
MV 1650 AW	16' 0"	50"	74"/22"	21"	40 HP	60 HP ¹	—	485#	5/770#	.102"	Modified-V	11	Opt.	—	Opt.
VB 1650 AW Tunnel	16' 0"	50"	74"/22"	21"	40 HP	60 HP ¹	—	485#	5/770#	.102"	Flat-V tunnel	11	Opt.	—	Opt.
Waterfowler 16	16' 0"	50"	74"/22"	21"	40 HP	—	—	525#	5/855#	.102"	Modified-V	11	—	—	—


¹ With optional floor package installed at factory only

LIVEWELL-aerated	STORAGE COMPARTMENTS	DRY STORAGE COMPARTMENTS	GUN BOX—w/cushion seat	SEATS—Driver & Passenger or Flip-Flop seat, Console	FISHING SEATS	SEAT PEDESTAL BASES	COOLER—below flip-flop seat	FLOOR, Aluminum w/sides	DROP DECK	TROLLING MOTOR/GRAPH Minnkota/Lowrance	TROLLING MOTOR HARNESS 12/24V receptacle (17=tilt-trim)	LIGHTS—navigation, courtesy	POWER POINTS	BILGE PUMP	SPRAY-IN FLOOR LINER—Linex	SPONGONS	PAINT COLOR	CAMO PAINT
4	2	1	—	Cons.	2	2 pin	—	4	—	Opt.	4 12V	4	2	4	Opt.	—	Khaki	Opt.
4	2	1	—	Cons.	2	2 pin	—	4	—	Opt.	4 12V	4	2	4	Opt.	Opt.	Khaki	Opt.
4	3	1	—	2	2	2 pin	—	4	—	Opt.	4 12V	4	2	4	Opt.	—	Khaki	Opt.
4	3	1	—	2	2	2 pin	—	4	—	Opt.	4 12V	4	2	4	Opt.	Opt.	Khaki	Opt.
—	2	—	Opt.	—	Opt.	Opt.	—	Opt.	—	Opt.	—	Opt.	—	—	—	—	Khaki	Opt.
—	2	—	Opt.	—	Opt.	Opt.	—	Opt.	—	Opt.	—	Opt.	—	—	—	Opt.	Khaki	Opt.
—	1	—	2	—	Opt.	1 pin	—	4	4	Opt.	4 12V	4	2	4	—	—	Khaki	Opt.

JONS Riveted



1442 & 1436

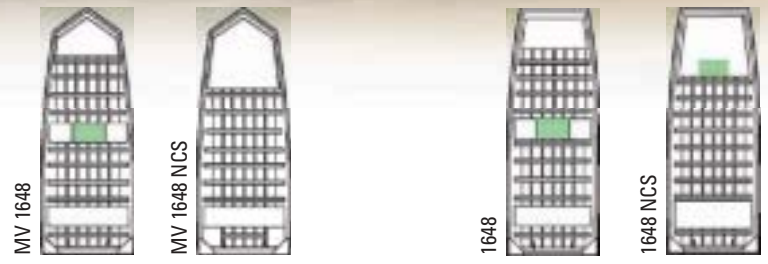

STORAGE
LIVEWELL

OLIVE DRAB GREEN PAINT

STRONG, FORGED PISTONS add durability. Aluminum alloys are compressed in molds under extreme pressure, resulting in a much stronger piston.



	LENGTH	BOTTOM WIDTH	BEAM/SIDE HEIGHT	TRANSOM HEIGHT	HORSEPOWER—maximum	WEIGHT—approximate	CAPACITY—persons/lbs.	HULL GAUGE	HULL TYPE—riveted	NUMBER OF RIBS	SIDE STEERING—no feedback	LIVEWELL—in center seat	CENTER BENCH SEAT	CAMO SEAT—w/clamp	LIGHT BRACKET, TROLLING MOTOR BRACKET	COLOR
MV 1648	16'0"	48"	70"/21"	15" or 20"	40 HP	280#	5/1010#	.070"	Modified-V	9	Opt.	Opt.	4 w/storage	Opt.	Opt.	Olive Drab Green
MV 1648 NCS	16'0"	48"	70"/21"	15" or 20"	40 HP	310#	5/1010#	.070"	Modified-V	9	Opt.	—	—	Opt.	Opt.	Olive Drab Green
1648	16'0"	48"	70"/21"	15" or 20"	35 HP	285#	5/1010#	.070"	Flatbottom	9	Opt.	Opt.	4 w/storage	Opt.	Opt.	Olive Drab Green
1648 NCS	16'0"	48"	70"/21"	15" or 20"	35 HP	260#	5/1010#	.070"	Flatbottom	9	Opt.	—	—	Opt.	Opt.	Olive Drab Green